




**WHERE
PRECISION
DRIVES
PRODUCTION**

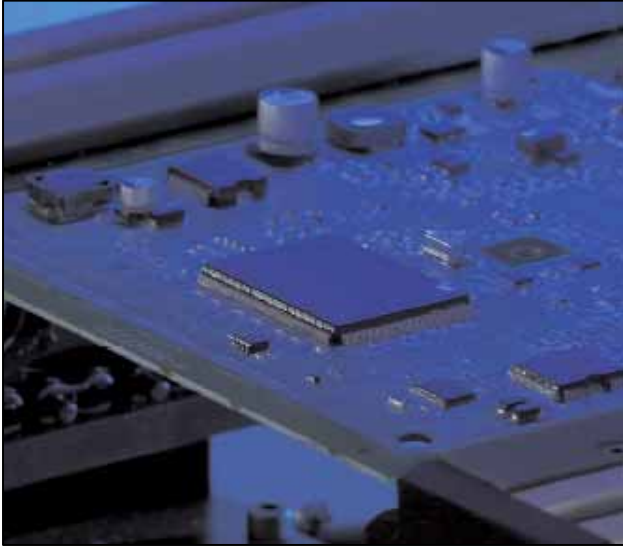

SYSTEM SPECIFICATIONS

Power Requirements:

208, 230, 400, 460 VAC, +/-10%, 50/60 Hz

UV Cure Lamps:

Fusion[®] UV lamps

UV Cure Beam Width:

6", 10", 12" or 20"

Conveyor Speed:

0.9 m/min to 5.8 m/min
(3 ft/min to 19 ft/min)

Board / Pallet Width:

51 mm to 508 mm
(2 in to 20 in)

Component Clearance:

76.2 mm (3 in) top and bottom

Conveyor Height:

940 mm to 965 mm from floor
(37 in to 38 in, SMEMA standard)

Exhaust:

1000 cfm exhaust fan with low level
alarm included

Certification:

CE

UV1000 ULTRAVIOLET LIGHT CURING SYSTEM

The UV1000 is a compact UV curing module suitable for high intensity, rapid curing of UV coatings, adhesives, and inks. The UV1000 features Fusion[®] UV lamps that generate a highly concentrated polymerization beam in 6", 10" 12", and 20" widths.

The UV1000 has many integrated features including:

- ▲ Edge carrying, variable speed pin chain conveyor
- ▲ Rail expansion compensation
- ▲ SMEMA communication protocol
- ▲ Allen Bradley Micrologix PLC controller
- ▲ Three-inch top and bottom side component clearance
- ▲ Compact 4' long footprint
- ▲ Top-sided 6", 10", 12", or 20" processing

For more information on PVA's automated dispensing and curing capabilities, please contact a sales representative at (518) 371-2684.



15 Solar Drive
Halfmoon NY 12065
tel 518 371 2684
fx 518 371 2688
www.pva.net

