



INNOVATION. PRECISION. EXCELLENCE.



System Specifications

Dispense Valve

CAM200

Dispense Outlet

Luer lock adapter

Fluid Reservoir

20 oz cartridge

Fluid Viscosity Range

1 cps - 40,000 cps

Wetted Components

Delrin, Teflon, Polypropylene, HDPE

Air

80 psi
(5.5 bar)

Optional Valve Stand

PV105-1 with solvent/purge cup



CAM200-200-1

Handheld Dispense System

This complete manual dispense system is typically used for applying low to medium viscosity fluids with a handheld, wand style dispense valve. It utilizes a CAM200 all plastic valves activated with simple lever to start and stop fluid flow for applying dots or beads without the need for a controller.

The 20 oz metal cartridge retainer with air cap is mounted onto a stand to hold plastic cartridges and feed the dispense valve through a fluid line.

Complete systems are supplied with all necessary fluid fittings and tubing (6ft) to run out of the box.

The CAM200-200-1 has many additional integrated features including:


- All plastic components for chemical compatibility
- Ability to dispense cyanoacrylate and anaerobic adhesives and masking materials

For more information, please contact PVA at info@pva.net or contact your local representative.

REV - 3/2024

Headquarters
6 Corporate Drive | Halfmoon, NY 12065
tel +1 518 371 2684 | fx +1 518 371 2688
www.pva.net | info@pva.net

System Assembly

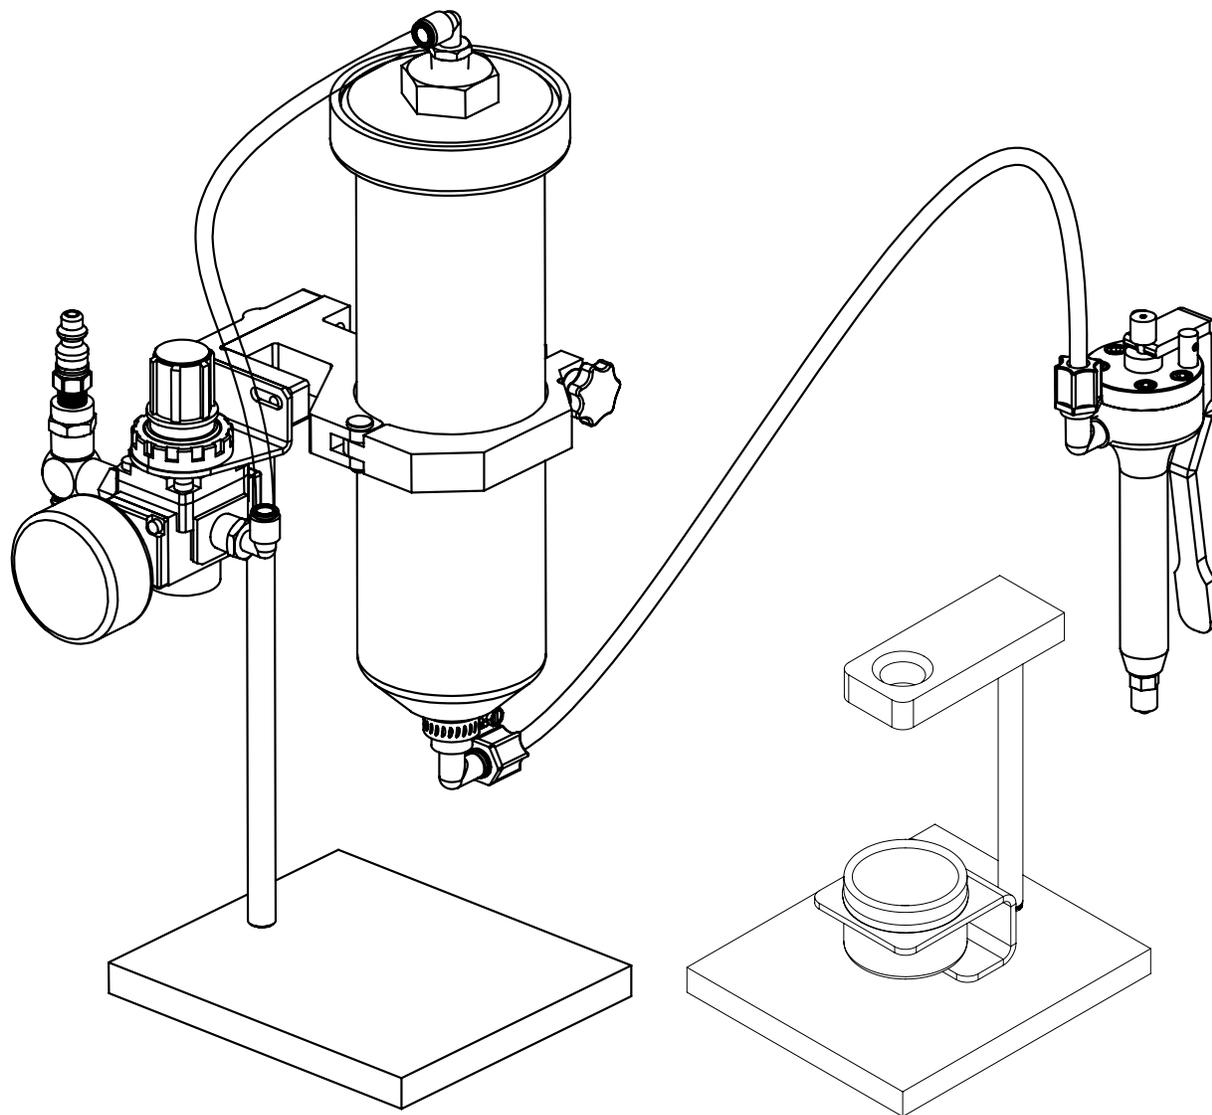

System shown above includes optional PV105-1 Valve Stand with solvent/purge cup.