




INNOVATION. PRECISION. EXCELLENCE.

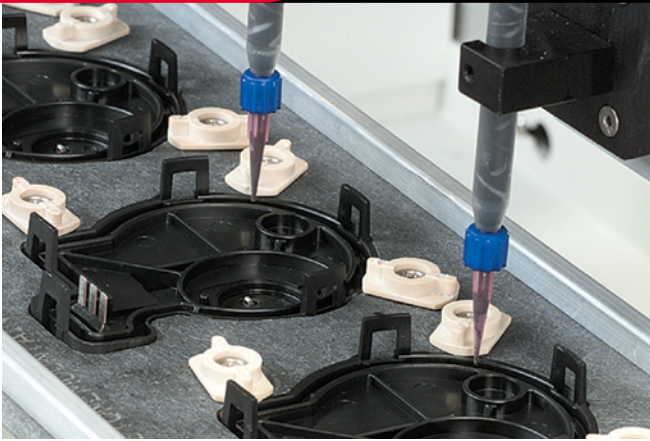

System Specifications

| | |
|-----------------|---|
| SMR-LP | Two component servo meter rod system, 1500 psi |
| SMR-LP-1 | One component servo meter rod system, 1500 psi |
| SMR-HP | Two component high pressure servo rod metering system, 5000 psi |

Power

220 - 480 VAC +/-10%, 50-60 Hz

Viscosity Range

10 - 1 million cps

Flow Rate Per Component*

Variable/programmable
1 - 40 cc/sec

Mix Ratio

Variable/programmable, 1:1 to 10:1

Maximum Shot Size

400 cc for 1:1 ratio

Air

80 psi, dry unlubricated



*Material viscosity dependent

SMR Series Servo Metering Rod Systems

The SMR Series are fully programmable servo metering rod systems to precisely meter two component materials with abrasive fillers. The construction of the system includes a case-hardened metering rod and metering cylinder with a lip seal. Rod pump technology produces accurate deposits as the metering rod advances through the metering cylinder.

The metering rod never contacts the metering cylinder walls. Rod bearing supports are external and do not come in contact with the abrasive media.

The SMR has many additional integrated features including:

- Independent servo driven metering cylinder
- 1 inch diameter metering rods
- 200 cc max displacement volume per side (400 cc total at 1:1 ratio)
- Case-hardened rods with lip seal packing
- High flow shutoff valves for refill and dispense
- Digital pressure transducers
- Teflon lined, stainless steel braided hoses
- Enclosed frame with casters
- 5000 PSI maximum operating pressure
- Servo controlled pre-shot pressure
- Configurable top or rear outlet porting

For more information, please contact PVA at info@pva.net or contact your local representative.

REV - 12/2025

Headquarters
6 Corporate Drive | Halfmoon, NY 12065
tel +1 518 371 2684 | fx +1 518 371 2688
www.pva.net | info@pva.net

SMR Dimensions

